

# TECHNICAL INFORMATION


0R16A3E (PN-008EN)

## Excellent Adhesive Strength Double Coated Adhesive Tape

**DAITAC # 8840ER**

### CONSTRUCTION

Tape Thickness  
0.135mm

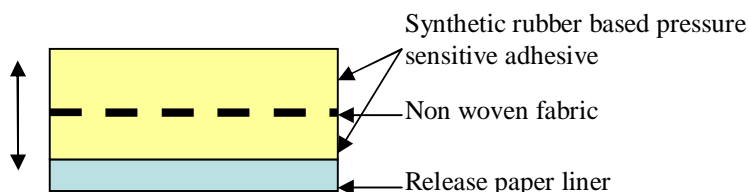

### CHARACTERISTIC

- Excellent adhesive strength to various plastic material and metal.
- High adhesion to polyolefin plastic and various rubber materials and thermoplastic elastomers.
- Good repulsion resistance, heat resistance and humidity resistance.

\*Caution: There is a possibility that migrated substances decrease adhesive strength of this tape. If you will use it for bonding rubber materials and thermoplastic elastomers, please examine enough before use.

### APPLICATION

- For bonding a variety of materials for industry.
- For bonding rubber materials in the automotive

### PROPERTY

		unit	# 8840ER
Peel strength at 180° angle	S U S	N / 20mm	29.4
	A l		30.0
	A B S		27.0
	P M M A		25.0
	P C		27.0
	P S		28.0
	P P		27.0
	CR rubber		8.0
	EPDM rubber		10.0
Holding power (40 , 1kg)		mm / h	2 >
Ball Tack		No.	13

### STANDARD SIZE

1060 mm in max width / 50 m in length