


Double Coated Foam Tape GB-0817L

Technical Data Sheet

General Description Soken tape GB-0817L combines flexible backing, black polyethylene foam, with high performance acrylic adhesives, that provides good initial tack and offers high ultimate adhesion to a wide variety of surfaces.

Product Construction

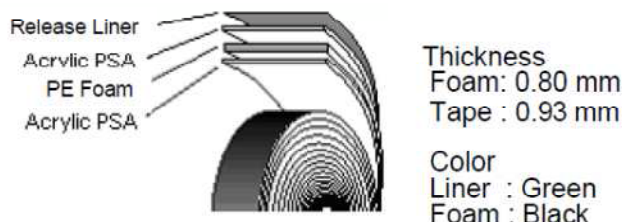

- Characteristics**
- Use of PE foam increases the overall tape thickness, hence remove any gap or unevenness on the adherent surface
 - PE foam has a spongy effect which absorb stress exerted on the tape
 - Stable, good as permanent bonding material
 - Resistance to water, oil, alkali, and acid

- Applications**
- Adhere to interior and exterior decorations of automobiles, vessels, and building materials
 - Reinforce household electrical applications, OA equipment, steel cabinet, etc
 - Signboards, display panels, and name plate adhesion
 - Window frame, show case, and partition installation

Properties	Item	Value	Test Procedures
	Peel Strength (N/m)	1520	180 degree peel at 300mm/min, 23 °C65%RH, to test plate, 20min conditioning time
	Holding Power (mm)	0.5	1kg weight held for 1 hour to SUS with 20×20mm overlap area at 40°C, 20min conditioning time
	Ball Tack	29	23 °C 65%RH, according to J Dow method

Shelf Life Six months from the date of receipt by customer when stored in the original packaging at 5~30°C and up to 50% Relative Humidity.

Authorized Distributor in Thailand:

MaterialOne (Thailand) Limited 568/4 Soi Lat Phrao 112 (Aumsomboon), Lat Phrao Rd., Phlappla, Wang Thonglang Bangkok 10310 Tel.02-026-3363 Fax.02-539-6319 E-mail: cs@materialone.co.th