


## Double Coated Tape W-200BD

### Technical Data Sheet

**General Description** Soken tape W-200BD is a double coated PET adhesive tape with high performance acrylic adhesives that provides good initial tack and offers high ultimate adhesion to a wide variety of surfaces.

### Product Construction

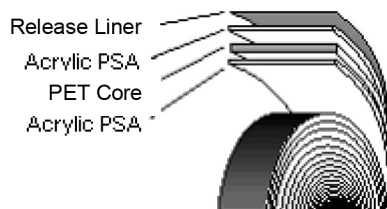

Tape Thickness : 0.156 mm

PET Core Thickness: 0.100 mm

**Characteristics**

- High adhesion with good balance of holding power and tack
- Excellent performance under a wide range of temperature
- Excellent resistance against repellent force and durability for ageing
- High adhesion to metal, glass, plastics and PU foam and other various surfaces

**Applications**

- General industrial use such as automobile, electronic product, nameplates, etc.
- Household use, stationery, posters, etc.
- Permanent attachment to metal and plastics

Properties	Item	Value	Test Procedures
	Peel Strength (N/m)	640	180 degree peel at 300mm/min, 23 °C 65%RH, to SUS test plate, 20min conditioning time
	Holding Power ( mm )	0.2	1kg weight held for 1 hour to SUS with 20×20mm overlap area at 40°C, 20min conditioning time
	Ball tack	8	23 °C 65%RH, according to J Dow method

**Shelf Life** Six months from the date of receipt by customer when stored in the original packaging at 5~30°C and up to 50% Relative Humidity.

**DISCLAIMER:** The above figures are taken from experiments conducted under standard conditions at Soken Chemical Asia Co.,Ltd. They are not meant to be guaranteed values, to serve as reference only. Thorough evaluation of the actual application of Soken Tape must be conducted before use.

### Authorized Distributor in Thailand:

**MaterialOne (Thailand) Limited** 568/4 Soi Lat Phrao 112 (Aumsomboon), Lat Phrao Rd., Phlappha, Wang Thonglang Bangkok 10310 Tel. 02-026-3363 Fax. 02-539-6319 E-mail: cs@materialone.co.th