

March, 2014


3M™ Glass Cloth Tape 361

Product Description

3M™ Glass Cloth Tape 361 is coated with a silicone adhesive for many applications requiring high temperature resistance, high adhesion and a very strong, abrasion- resistant backing.

Product Features

- Can be certified to meet FAR 25.853 (a) Appendix F Part I (a) (1) (ii), flame resistant specification.
- Can withstand intermittent temperatures up to 550°F (288°C) or higher, depending upon the type and duration of the heat source.
- Continuous exposure to temperatures above 450°F (232°C) will gradually degrade the adhesive causing loss of tape adhesion and darken the glass cloth backing.

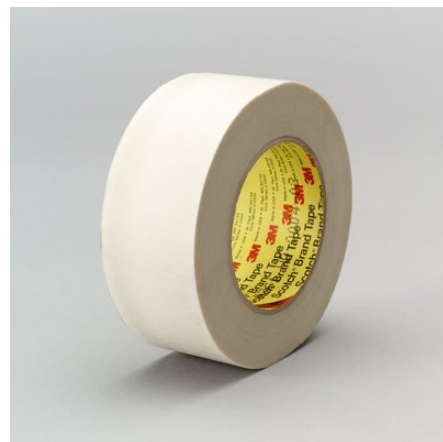

3M™ Glass Cloth Tape 361

Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Typical Physical Properties

Property	Values		Method
Color	White		
Total Tape Thickness	0.16 mm	6.4 mil	ASTM D3652
Backing Thickness	0.13 mm	5 mil	ASTM D3652
Backing	Glass Cloth		
Adhesive	Silicone		

Typical Performance Characteristics

Property	Values		Method	Substrate
Peel Adhesion	4.2 N/cm	38 oz/in	ASTM D3330	Stainless Steel
Tensile Strength	255.7 N/cm	2336 oz/in	ASTM D3759	
Elongation at Break	9 %		ASTM D3759	
Temperature Use Range	-54 to 232 °C	-65 to 450 °F		

Available Sizes

Property	Values	
Standard Roll Length	55 m	60 yd

Table continued on next page

3M™ Glass Cloth Tape 361

Available Sizes (continued)

Property	Values	
Standard Width	13, 19, 25, 38, 50, 75 mm	1/2, 3/4, 1, 1 1/2, 2, 3 in

Handling/Application Information

Application Ideas

- High temperature applications requiring high tensile strength, good holding power and abrasion resistance.
- Permanent sealing of high temperature ducts or chambers.
- As a back up strip for submerged arc welding.
- Applications requiring heat treatment followed by clean removal of the tape with little or no stain.

Storage and Shelf Life

Store under normal conditions of 60° to 80°F (16° to 27°C) and 40 to 50% R.H. in the original carton.
To obtain best performance, use this product within 24 months from date of manufacture.

Industry Specifications

Can be certified to meet FAR 25.853 (a) Appendix F Part I (a) (1) (ii)

3M™ Glass Cloth Tape 361

Information

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

References

Safety Data Sheet (SDS)

https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en_US&co=ptn&q=361

3M™ Glass Cloth Tape 361

ISO Statement

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001 standards.



Industrial Adhesives and Tapes
Division
3M Center
St. Paul, MN 55144-1000
800-362-3550
www.3M.com

Please recycle.
© 3M 2019. All Rights
Reserved.

The brands listed above are trademarks of
3M