


Double Coated Tape A-7502

Technical Data Sheet

General Description Soken tape A-7502 is a double coated non-woven fabric adhesive tape with high performance acrylic adhesives that provides good initial tack and offers high ultimate adhesion to a wide variety of surfaces.

Product Construction

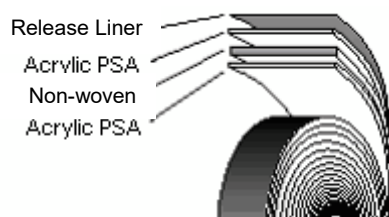

Tape Thickness: 0.115 mm

Characteristics

- High adhesion with good balance of holding power and tack
- Excellent performance under a wide range of temperature
- Excellent resistance against repellent force and durability for ageing
- High adhesion to metal, glass, plastics and PU foam and other various surfaces

Applications

- General industrial use such as automobile, electronic product, nameplates, etc.
- Household use, stationery, posters, etc.
- Permanent attachment to metal and plastics

Properties

Item	Value	Test Procedures
Peel Strength (N/m)	820	180 degree peel at 300mm/min, 23 °C 65%RH, to test plate, 20min conditioning time
Holding Power (mm)	0.5	1kg weight held for 1 hour to SUS with 20×20mm overlap area at 40°C, 20min conditioning time
Ball tack	23	23 °C 65%RH, according to J Dow method

Shelf Life

Six months from the date of receipt by customer when stored in the original packaging at 5~30°C and up to 50% Relative Humidity.

IMPORTANT NOTICE: The above figures are taken from experiments conducted under standard conditions at Soken Chemical Asia Co.,Ltd. They are not guaranteed values, to serve as reference only.

Materialone (Thailand) Limited 568/4 Soi LatPhrao 112 (Aumsomboon) Lat Phrao Rd. Plubpla
Wangthonglang Bangkok 10310 Thailand
Tel : 02-026-3363 E-mail : support@wetapestore.com