




Soken Tape SCA3275B/W

Technical Data Sheet

General Description Soken Tape SCA3275B/W is a protective film designated for rough surface application. High resistance to scratches or abrasions and ultra violet (UV) lights with high performance adhesive and no residual adhesive over long period of time.

Product Construction

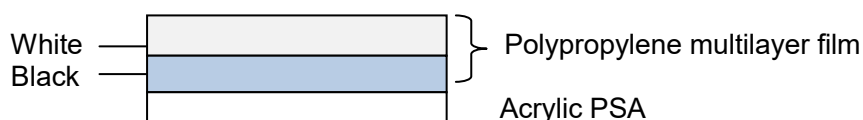

Tape Thickness: 85 μ m

Characteristics

- Superior adhesion performance on rough powder coated surface.
- High adhesive strength with no residual adhesive on attached surface over long period of time.
- High resistance to ultra violet (UV), scratches or abrasions.

Applications

- Protective film on powder coated rough surface.

Properties

Test Item	Value	Test Procedures
Peel Strength (N/m)	400	180 degree peel at 300mm/min, 23 °C 65%RH, to test plate, 20min conditioning time
Holding Power (mm)	0.1	1kg weight held for 1 hour to SUS with 20×20mm overlap area at 40°C, 20min conditioning time
Ball tack	24	23 °C 65%RH, according to J Dow method

Shelf Life

Six months from the date of receipt by customer when stored in the original packaging at less than 40°C and up to 70% Relative Humidity

DISCLAIMER: The above figures are taken from experiments conducted under standard conditions at Soken Chemical Asia Co., Ltd. They are not meant to be guaranteed values, to serve as reference only. Thorough evaluation of the actual application of Soken Tape must be conducted before use.

Materialone (Thailand) Limited 568/4 Soi LatPhrao 112 (Aumsomboon) Lat Phrao Rd. Plubpla
Wangthonglang Bangkok 10310 Thailand
Tel : 02-026-3363 E-mail : support@wetapestore.com